



ANLY TIMER

H3B MULTI-RANGE ANALOGUE TIMER



CHARACTERISTIC :

- 5 (A, B, C, D, E) timing series available
- Each timing series has 4 time ranges, selectable via DIP switch
- 2 modes selectable via slide switch: Mode A (2C) for DPDT time-limiting output contacts and Mode B (1A1C) for SPDT instantaneous and time-limiting output contacts
- UL, C-UL recognized and CE certified

SPECIFICATION :


Operating voltage	DC(V): 12, 24 AC(V): 100~120 or 200~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	DC 12V: 0.85W, DC 24V: 1.1W AC120V: 3.5VA, AC240V: 6.5VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 105g

TYPE SELECTION :


Type	Time range			
H3B-A	1S	10S	1M	10M
H3B-B	3S	30S	3M	30M
H3B-C	6S	60S	6M	60M
H3B-D	1M	10M	1H	10H
H3B-E	3M	30M	3H	30H

CONNECTION :

2C, Mode A




1A1C, Mode B




TIMING CHART :

2C, Mode A




1A1C, Mode B




DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 Socket or PF085A Socket

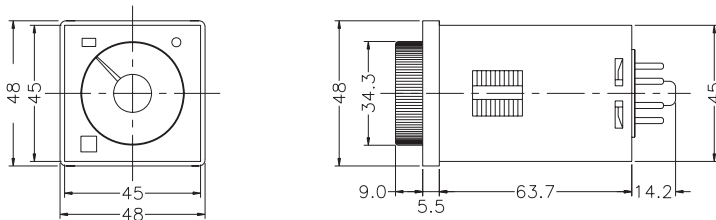

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket or P3G-08 Socket

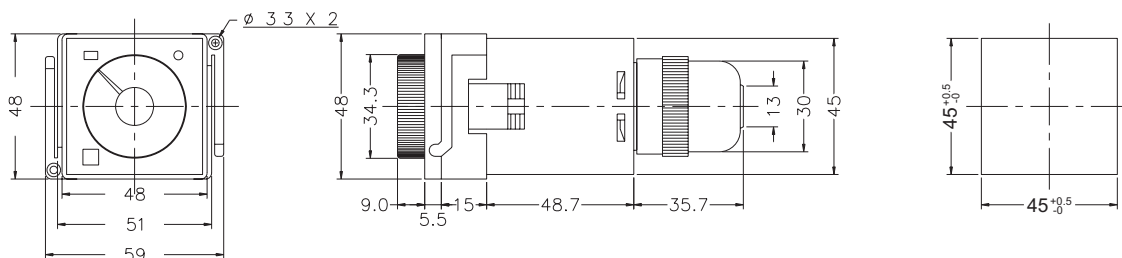

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911