



# ANLY TIMER

## ET2-41 TWIN TIMER



### CHARACTERISTIC :

- Wide operating voltage range, AC/DC 24V~240V
- 10 time range, from 1 second to 300 hour
- X1, Y1, Y2 contact for mode control
- 22.5 mm thin body design


### SPECIFICATION :

|                                   |  |
|-----------------------------------|--|
| Operating voltage                 | AC/DC(V): 24~240   |
| Allowable operating voltage range | 85~110% of rated operating voltage                       |
| Rated frequency                   | 50 / 60 Hz   |
| Contact rating                    | 250VAC 5A (resistive load)                               |
| Reset time                        | MAX 0.1S   |
| Power consumption                 | Approx. 3VA  |
| Life                              | Mechanical: 5,000,000 times<br>Electrical: 100,000 times |
| Ambient temperature               | -10 ~ +50°C  |
| Ambient humidity                  | MAX 85%RH  |
| Weight                            | Approx. 93g  |

### TYPE SELECTION :

|                |  |
|----------------|--|
| Type           | ET2-41   |
| Operation mode | B6   |
| Output contact | 2C / 1A1C  |
| Time range     | 10 Ranges: 1s / 3s / 10s / 30s / 100s / 300s / 30m / 300m / 30h / 300h |


## CONNECTION :

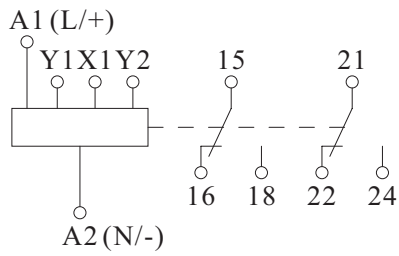

| Contact | Short                  | Open                  |
|---------|------------------------|-----------------------|
| Y1 - A1 | Repeat cycle OFF start | Repeat cycle ON start |
| Y2 - A1 | 2C                     | 1A1C                  |
| X1 - A1 | Gate                   | ---                   |


## TIMING CHART :

Mode B6 : Circulation

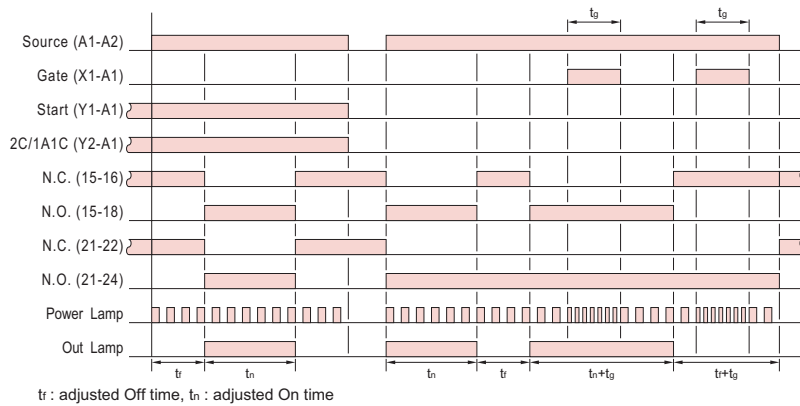

## DIMENSIONS : (mm)

N type(Surface Mounting):

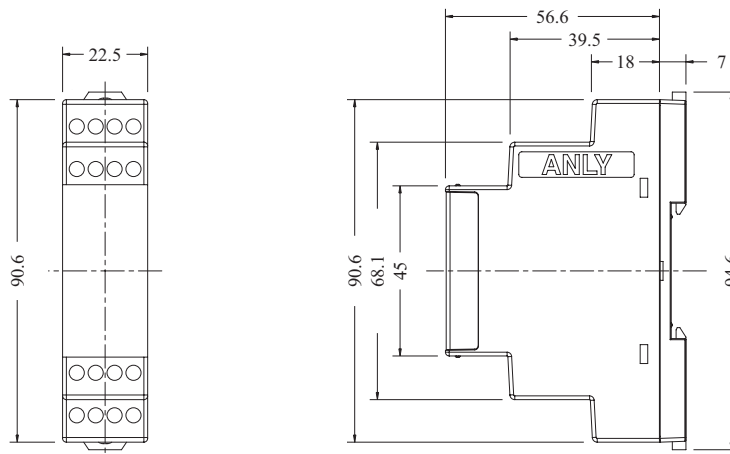

## ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

### TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242  
 TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

### MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
 TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

### HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
 TEL: +852-2397-2505 FAX: +852-2397-6080

### SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041  
 TEL: +86-21-6218-3300 FAX: +86-21-6217-5911